

MODEL 291 PORTABLE ACOUSTIC TAG RECEIVER




HTI-VEMCO USA, INC.



The *Model 291 Portable Acoustic Tag Receiver* is a portable 12 VDC version of the desktop *Model 290 Acoustic Tag Receiver*. Designed specifically for tracking fish tagged with *Model 795/900 Acoustic Tags*, the portable *Model 291 System* provides virtually all of the functions of the *Model 290 Acoustic Tag Receiver* in a compact, economic, four-hydrophone package operating on 12 VDC.

Both the *Model 291* and the *Model 290 Acoustic Tag Receivers* remotely track fish in three dimensions with sub-meter position resolution. While the *Model 290 Acoustic Tag Receiver* supports up to 16 hydrophones, the *Model 291 Portable Acoustic Tag Receiver* accepts up to 4 hydrophones. Both enable the user to observe the movement of each tracked animal (e.g., fish, and other aquatic species) in three dimensions. The *Model 291 Portable Acoustic Tag Receiver* offers the following:

- Portable, compact unit powered by 12 VDC.
- Monitors up to four hydrophones simultaneously.
- Can be used for mobile tracking and presence or absence monitoring using one hydrophone.
- Sub-meter position resolution for three-dimensional positions (e.g., once every second) with four hydrophones.
- Much higher resolution positions than with radio tags and without the common depth detectability limits (typically 10 m).
- Tag sizes range from 0.55 g to 24 g in air.

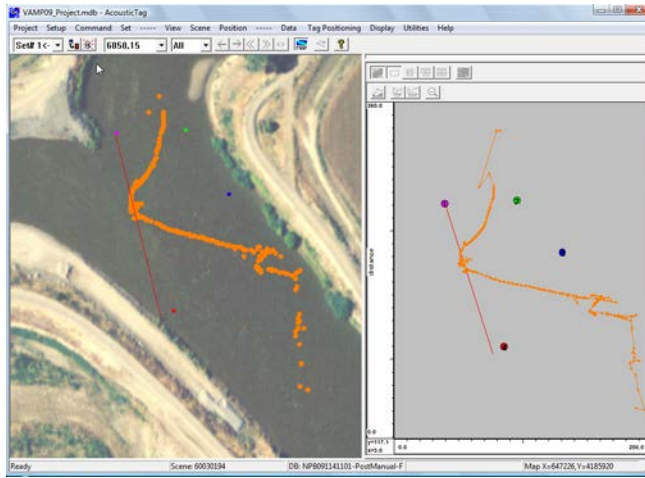

MODEL 291 PORTABLE ACOUSTIC TAG RECEIVER

- Power Supply:** 12 VDC standard (optional 100, 120, 220, and 240 VAC converters available)
- Dimensions:** (L x W x H) 43.2 x 25.4 x 10.9 cm (17 x 10 x 4.3 inches) without PC or hydrophones.
- Weight:** 7.7 kg (17 lb), without PC or hydrophones
- Operating Frequency:** 307 kHz standard
- Operating Temperature:** 0-50°C (32-122°F)
- Power Consumption:** 25 watts without PC or hydrophones
- Number of Hydrophones:** Each *Model 291 Portable Acoustic Tag Receiver* can log data from up to four hydrophones simultaneously.
- Data Displays:** Using the tag track display program *AcousticTag*, three-dimensional and two-dimensional displays of fish tracks can be viewed in playback or real-time. The user can control view rotation and speed of playback for each tag track.
- System Synchronization:** Can be time synced via GPS satellites with other *Model 290-Series Acoustic Tag Receivers* and *Model 300-series Data Loggers*.
- Remote Operation:** Modem or satellite communication software permits full remote operation and basic diagnostic/quality control review of the *Model 291 Portable Acoustic Tag Receiver* from virtually anywhere in the world.

MODEL 590 ACOUSTIC HYDROPHONES- See separate spec sheet.

MODEL 690 HYDROPHONE CABLES

- Hydrophone Cables:** *Model 690 Hydrophone Cables* are available in 8-305 m (25-1000 ft) lengths standard. Can be combined for additional lengths.
- Armored Cables:** *Model 696 Armored Hydrophone Cables* are steel reinforced for strength and durability, and are available in 15-305 m (50-100 ft) lengths.

MODEL 795/900 ACOUSTIC TAGS – See separate spec sheet.

NOTES

- Resolution:** Sub-meter three-dimensional resolution requires
- 1) Proper hydrophone geometry,
 - 2) Known location of hydrophones, and
 - 3) Adequate signal-to-noise ratio.
- Computer Req.:** Contact HTI for computer specs.
- Specifications:** All specifications subject to change without notice.

HTI-DEMCO USA, INC.

711 NE Northlake Way, Seattle, WA 98105 USA
 Tel. 206.633.3383 | 206.633.5912 Fax
 support@HTIsonar.com www.HTIsonar.com